



Kabelové zatahovací punčochy

Pro optické a koaxiální kabely:



Typ	pro vnější průměr kabelu [mm]			
L 9	6 – 9	J 6	4 - 6	
L 12	9 – 12	J 9	6 - 9	
L 19	12 - 19	J 12	9 - 12	


Pro zemní kabely:



K 15/1	10 – 15	K 30/3	20 - 30	
K 20/1	15 – 20	K 40/3	30 - 40	
K 30/1	20 – 30	K 50/3	40 - 50	
K 40/1	30 – 40	K 60/3	50 - 60	
K 50/1	40 – 50			
K 60/1	50 – 60			
K 70/1	60 – 70			
K 90/1	70 – 90			
K 110/1	90 – 110			
K 130/1	110 – 130			
K 160/1	130 - 160			




Kabelové punčochy dělené

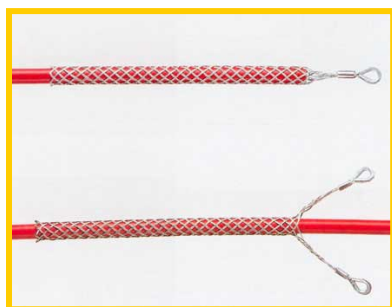

Typ	pro vnější průměr kabelu [mm]			
K 15/2G	10 – 15			
K 20/2G	15 – 20			
K 30/2G	20 – 30			
K 40/2G	30 – 40			
K 50/2G	40 – 50			
K 60/2G	50 – 60			
K 70/2G	60 – 70			
K 90/2G	70 – 90			
K 110/2G	90 – 110			
K 130/2G	110 – 130			
K 160/2G	130 - 160			

Punčochy pro tažení nadzemních ALFe vodičů

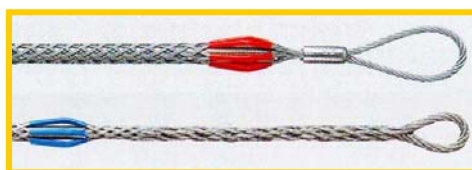

Typ	ø vodiče [mm]	ACSR [mm ²]
MS 11	6 – 11	25 – 50
MS 16	11 – 16	50 – 120
MS 21	16 – 21	95 – 210
MS 27	21 – 27	210 – 340
MS 38	27 – 38	340 – 680
MS 45	38 – 45	680 –

Příslušenství pro zemní kabely

Otočná spojka pro zemní kabely

Důležité spojení mezi tažným lanem a kabelovou punčochou, aby nedošlo ke zkroucení kabelu.



Typ	Ø x L/W - mm	F - kN	kg
V 20 D	20 x 86/ 7	7/ 21	0,150
V 25 D	25 x 120/ 9	10/ 30	0,320
V 35 D	35 x 120/ 12	20/ 60	0,600
V 45 D	45 x 180/ 16	50/ 150	1,500
V 60 D	60 x 217/ 23	75/ 225	3,100